


Temperature metering PT100 Option: analogue output

- Allows to be placed side by side in grid and mosaics systems

- Mounting into panels with thickness up to 50 mm

1888

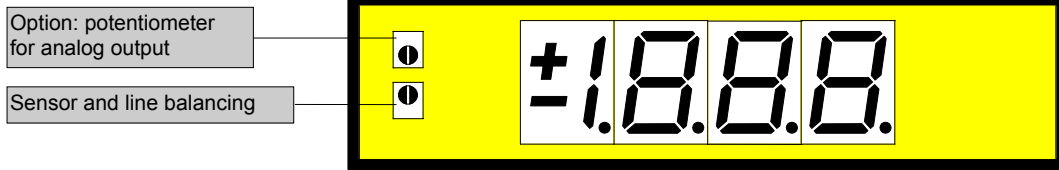


ORDER NUMBER OF TYPE

2 wire **DT 3.202.310B (200°C)**


2 wire **DT 3.206.310B (600°C)**

3+2 wire **DT 3.302.310B (200°C)**

3+2 wire **DT 3.306.310B (600°C)**

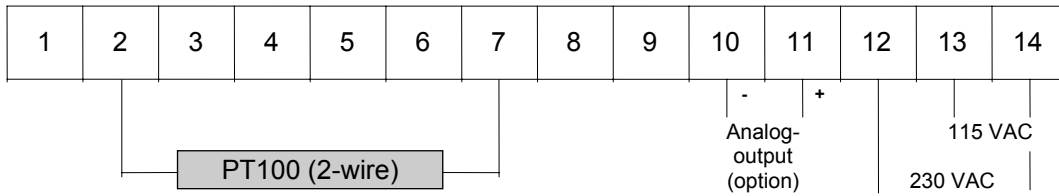

Power supply 24 VDC - **galvanic insulated** -
(14=plus, 13=minus)

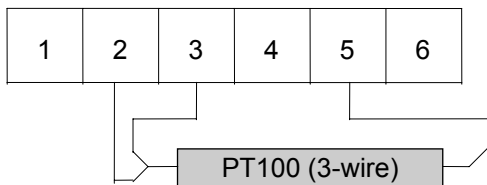

2 wire **DT 3.202.370B (200°C)**

2 wire **DT 3.206.370B (600°C)**

3+2 wire **DT 3.302.370B (200°C)**

3+2 wire **DT 3.306.370B (600°C)**

Options

- green LED
- Protection IP54
- Protection IP65
- Analog output 0-10 VDC/10 mA
- Analog output 0-20 mA/load 500 Ω
- Analog output 4-20 mA/load 500 Ω
- Analog output 0-10 VDC/10 mA *(power supply 24 VDC galvanic insulated)*
- Analog output 0-20 mA/load 500 Ω *(power supply 24 VDC galvanic insulated)*
- Analog output 4-20 mA/load 500 Ω *(power supply 24 VDC galvanic insulated)*
- Analog output with customer specified offset


The measuring inputs are not galvanic insulated from the analog output!

- Power supply 24/48 VAC
- Setpoints see type PTE 4.xxx.3xx

Technical data, handling

Dimensions	Housing	96 x 24 x 131 mm, including screw terminal
	Assembly cut out	92.0 ^{+0.8} x 22.0 ^{+0.6} mm
	Fastening	special quick plastic clamp proper to fix in wall thickness up to 50 mm
	Housing material	PC/ABS-plastic blend, colour black, UL94V-0
	Protective system	at the front IP40 connection IP00
	Weight	approx. 0.290 kg
	Connection	at the rear side via terminals up to 2.5 mm ²
Input	PT100	2-wire, 3-wire
Output	Analogue output	0-10 VDC/10 mA (0.1 % of measuring value, +/-0.05 % of full scale)
		0-20 mA, 4-20 mA - load 500 Ohm (0.1 % of measuring value, +/-0.05 % of full scale)
Type		
DT3.xx2.3xxB	Measuring range	-50.0 up to 199.9 °C
	Resolution	0.1 °C
DT3.xx6.3xxB	Measuring range	-100 up to +600 °C
	Resolution	1 °C
	Sensor current	approx. 1 mA
Accuracy		
DT3.xx2.3xxB	Measuring fault	max. +/- 0.5 °C
DT3.xx6.3xxB	Measuring fault	max. +/- 1 °C
	Temp. drift	100 ppm/K
	Measuring principle	Dual-Slope-Integration
Power unit	Supply voltage	230/115 VAC +/- 10 % (50-60 Hz), 24 VDC galvanic insulated
	Power consumption	approx. 2 VA
Indication	Display	LED with 7 segments, 14 mm high, red 3½-digit = indication 1999
	Indication time	1 second
	Line break	by showing „1“ on the fourth digit
Ambient conditions	Working temperature	0 up to + 60 °C
	Storing temperature	-20 up to + 80 °C

Housing:

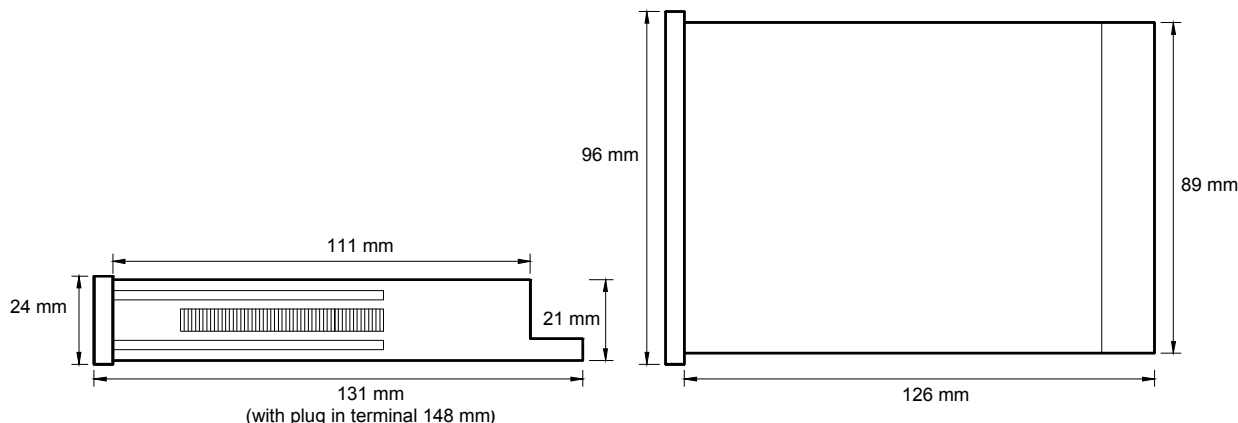

CE-sign

For unlimited use of the instrument within the directives for electromagnetic compatibility 89/336/EC measuring wires have to be used with shielded cable and cable's shield connected to earth ground at one end only.

Setting

The unit is adjusted ex works. Later adjustments are necessary in applications with long distance wiring only.

1. Connect the instrument according to the wiring diagram and turn power on.
2. Setting of sensor and line balancing: Remove the front pane using the eject gap.
3. Connect PT100 simulator and set temperature to 0°C.
4. If necessary deviations on the display have to be corrected with potentiometer for line balancing.