


**Temperature metering PT100 Option: analogue output**

- Allows to be placed side by side in grid and mosaics systems

- Mounting into panels with thickness up to 50 mm

**1888**

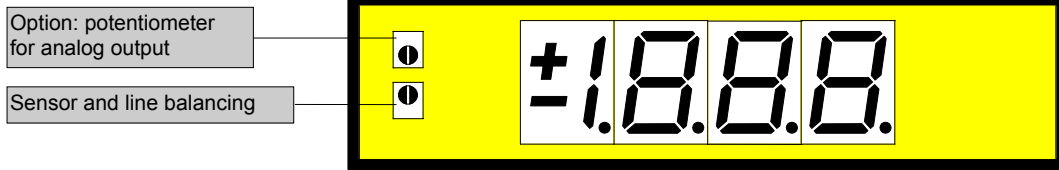


ORDER NUMBER OF TYPE

2 wire **DT 3.202.310B (200°C)**


2 wire **DT 3.206.310B (600°C)**

3+2 wire **DT 3.302.310B (200°C)**

3+2 wire **DT 3.306.310B (600°C)**

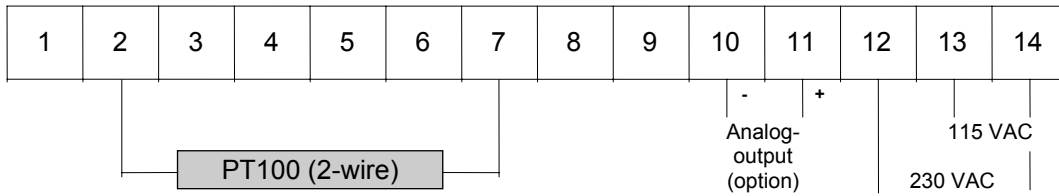

Power supply 24 VDC - **galvanic insulated** -  
(14=plus, 13=minus)

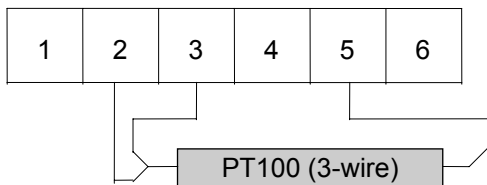

2 wire **DT 3.202.370B (200°C)**

2 wire **DT 3.206.370B (600°C)**

3+2 wire **DT 3.302.370B (200°C)**

3+2 wire **DT 3.306.370B (600°C)**

**Options**

- green LED
- Protection IP54
- Protection IP65
- Analog output 0-10 VDC/10 mA
- Analog output 0-20 mA/load 500 Ω
- Analog output 4-20 mA/load 500 Ω
- Analog output 0-10 VDC/10 mA *(power supply 24 VDC galvanic insulated)*
- Analog output 0-20 mA/load 500 Ω *(power supply 24 VDC galvanic insulated)*
- Analog output 4-20 mA/load 500 Ω *(power supply 24 VDC galvanic insulated)*
- Analog output with customer specified offset


**The measuring inputs are not galvanic insulated from the analog output!**

- Power supply 24/48 VAC
- Setpoints see type PTE 4.xxx.3xx

# Technical data, handling

<b>Dimensions</b>	Housing	96 x 24 x 131 mm, including screw terminal
	Assembly cut out	92.0 <sup>+0.8</sup> x 22.0 <sup>+0.6</sup> mm
	Fastening	special quick plastic clamp proper to fix in wall thickness up to 50 mm
	Housing material	PC/ABS blend, colour black, UL94V-0
	Protective system	at the front IP40 connection IP00
	Weight	approx. 0.290 kg
	Connection	at the rear side via terminals up to 2.5 mm <sup>2</sup>
<b>Input</b>	PT100	2-wire, 3-wire
<b>Output</b>	Analogue output	0-10 VDC/10 mA (0.1 % of measuring value, +/-0.05 % of full scale)
		0-20 mA, 4-20 mA - load 500 Ohm (0.1 % of measuring value, +/-0.05 % of full scale)
<b>Type</b>		
<b>DT3.xx2.3xxB</b>	Measuring range	-50.0 up to 199.9 °C
	Resolution	0.1 °C
<b>DT3.xx6.3xxB</b>	Measuring range	-100 up to +600 °C
	Resolution	1 °C
	Sensor current	approx. 1 mA
<b>Accuracy</b>		
<b>DT3.xx2.3xxB</b>	Measuring fault	max. +/- 0.5 °C
<b>DT3.xx6.3xxB</b>	Measuring fault	max. +/- 1 °C
	Temp. drift	100 ppm/K
	Measuring principle	Dual-Slope-Integration
<b>Power unit</b>	Supply voltage	230/115 VAC +/- 10 % (50-60 Hz), 24 VDC galvanic insulated
	Power consumption	approx. 2 VA
<b>Indication</b>	Display	LED with 7 segments, 14 mm high, red 3½-digit = indication 1999
	Indication time	1 second
	Line break	by showing „1“ on the fourth digit
<b>Ambient conditions</b>	Working temperature	0 up to + 60 °C
	Storing temperature	-20 up to + 80 °C

## Housing:

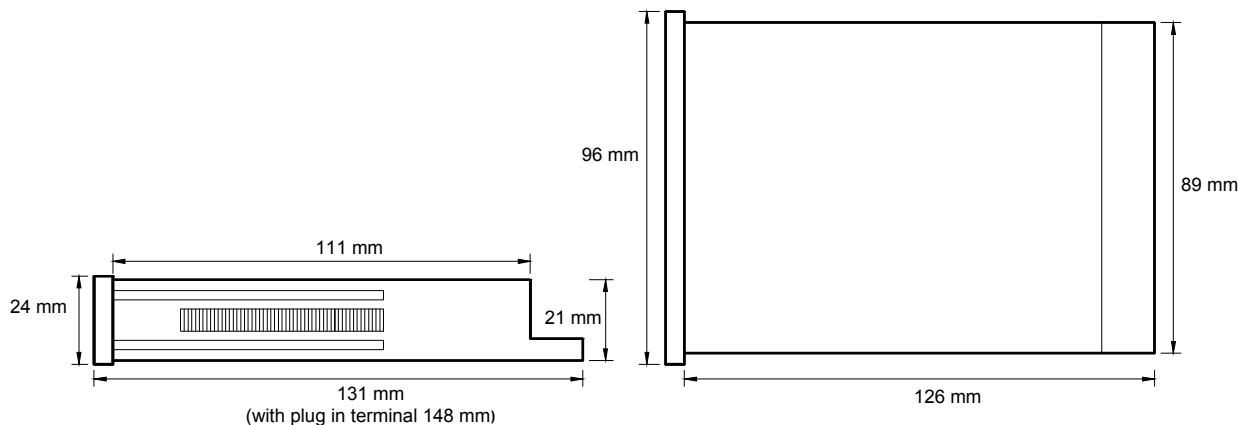

### CE-sign

For unlimited use of the instrument within the directives for electromagnetic compatibility 89/336/EC measuring wires have to be used with shielded cable and cable's shield connected to earth ground at one end only.

## Setting

**The unit is adjusted ex works. Later adjustments are necessary in applications with long distance wiring only.**

1. Connect the instrument according to the wiring diagram and turn power on.
2. Setting of sensor and line balancing: Remove the front pane using the eject gap.
3. Connect PT100 simulator and set temperature to 0°C.
4. If necessary deviations on the display have to be corrected with potentiometer for line balancing.