


Resistance, potentiometer measurement optional analogue output

- Allows to be placed side by side in grid and mosaics systems
- Mounting into panels with thickness up to 50 mm

48x24

1888

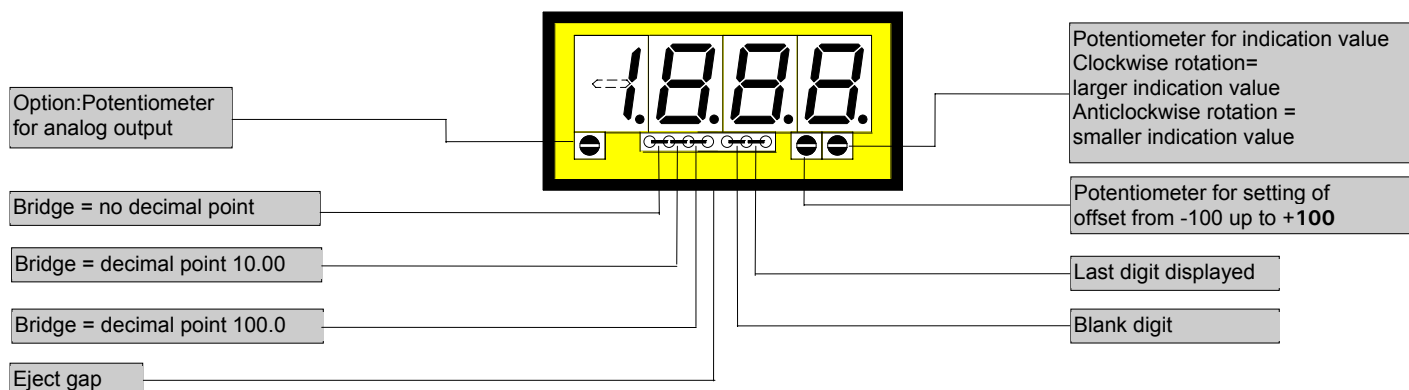


ORDER NUMBER OF TYPE

Measuring range 1 K Ω - 10 K Ω **DV 3.506.730B**

Measuring range 10 K Ω - 100 K Ω **DV 3.606.730B**

Measuring range 100 K Ω - 1 M Ω **DV 3.706.730B**

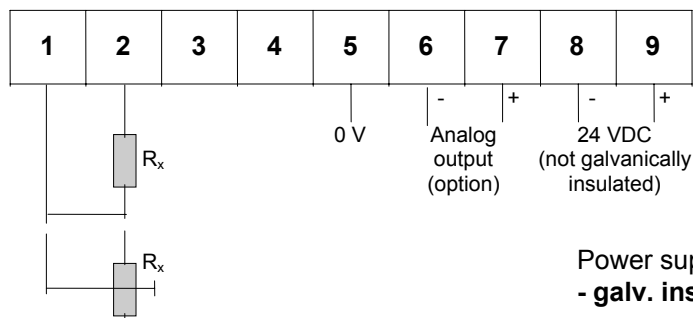

Power supply 24 VDC
- **galv. insulated** - (9=plus, 8=minus)

Measuring range 1 K Ω - 10 K Ω **DV 3.506.770B**

Measuring range 10 K Ω - 100 K Ω **DV 3.606.770B**


Measuring range 100 K Ω - 1 M Ω **DV 3.706.770B**

Options

- green LED
- Protection: IP54
- Protection: IP65 (**see reference**)
- Plug in terminal with protection IP40
- Plug in terminal with protection IP54
- Plug in terminal with protection IP65 (**see reference**)
- Reference: Decimal point and blank digit have to be pretended!**
- Analog output 0-10 VDC/10mA
- Analog output 0-20 mA /load 500 Ω
- Analog output 4-20 mA /load 500 Ω
- Analog output 0-10 VDC/10mA (power supply 24 VDC galvanic insulated)
- Analog output 0-20 mA /load 500 Ω (power supply 24 VDC galvanic insulated)
- Analog output 4-20 mA /load 500 Ω (power supply 24 VDC galvanic insulated)
- Analog output with customer specified offset
- Dimension strip selectable (8 characters max.)
- Set points see type PVE 4.006.7xx

Technical data, handling

Dimensions	Housing	48 x 24 x 90 mm, including screw terminal
	Assembly cut out	45.0 ^{+0.6} x 22.2 ^{+0.3} mm
	Fastening	special quick plastic clamp proper to fix in wall thickness up to 50 mm
	Housing material	PC/ABS-Blend, colour black, UL94V-0
	Protective system	at the front IP40
		connection IP00
	Weight	approx. 75 g
	Connection	at the rear side via plug in connector up to 1.5 mm ²
Input	Measuring range	1 KΩ - 10 KΩ
		10 KΩ - 100 KΩ
		100 KΩ - 1 MΩ
		Offset adjustment supported by offset potentiometer.
Output	Analogue output	0-10 VDC/10 mA (0.1 % of measuring value, +/-0.05 % of full scale)
		0-20 mA, 4-20 mA - load 500 Ω (0.1 % of measuring value, +/-0.05 % of full scale)
	Offset	fixed on zero point
	Final value	10 V or 20 mA are adjustable for indication range 350 to 1999
		The measuring inputs are not galvanically insulated from the analog output!
Accuracy	Resolution	+/- 1999 digit
	Nonlinearity	+/-0.1 % of measuring value, +/- 1 digit
	Temp. drift	100 ppm/K
	Measuring principle	Dual-Slope-Integration
Power Unit	Supply voltage	24 VDC +/-10 % not galvanic insulated,
		24 VDC (18-30 V) galvanic insulated
	Power consumption	approx. 2 VA
Indication	Display	LED with 7 segments, 10 mm high, red
		3½-digit = indication 1999
	Overflow	by showing of "1" on the fourth digit
	Decimal point	adjustable by bridging on front side
	Blanking	blanking out of first digit (selectable by bridge)
	Indication time	1 second
Ambient conditions	Working temp.	0 up to + 60 °C
	Storing temp.	-20 up to + 80 °C
Housing:		

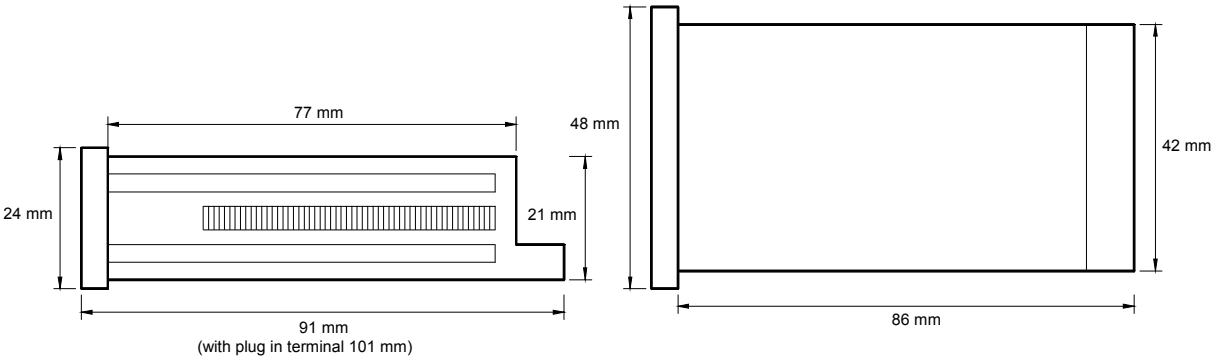

CE-sign
For unlimited use of the instrument within the directives for electromagnetic compatibility 89/336/EC analogue input wires have to be used with shielded cable and cable's shield connected to earth ground at one end only.

Setting

1. Connect the instrument according to the wiring diagram and turn power on.
2. Setting of indication value: Remove the front pane using the eject gap.
3. Set the resistance value and adjust the desired indication value by means of the potentiometer.
4. In order to achieve maximum value indication of 1999, the following minimum resistance values are required at the various measuring inputs:

Measuring input	1 MΩ	100 KΩ	10 KΩ
Resistance (min)	500 KΩ	50 KΩ	5 KΩ