



Measuring point check switch
 - Mounting into panels with thickness up to 50 mm

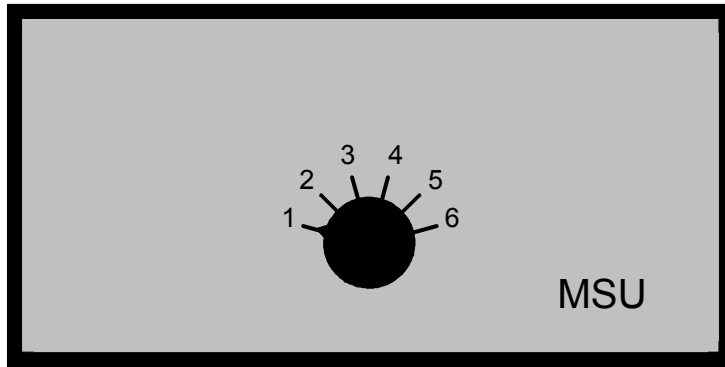

6 positions – 4 wire ORDER NUMBER OF TYPE
MSU06.40.106B

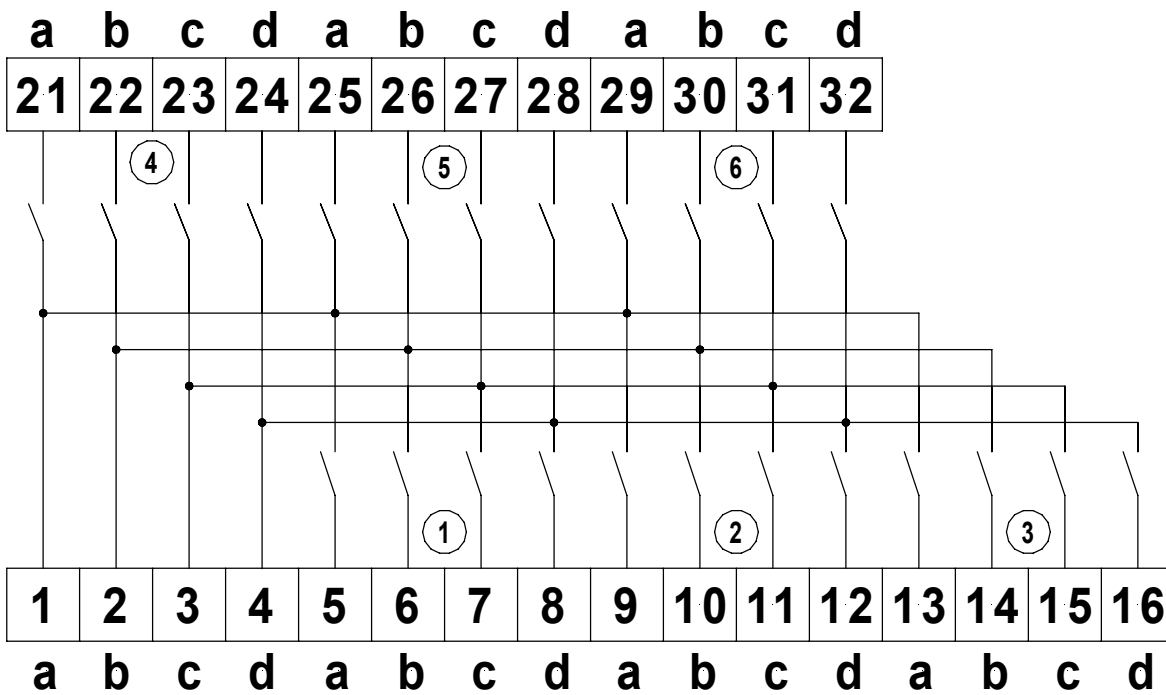

Technical data

Dimension	Housing	96 x 48 x 131 mm
	Assembly cut out	92.0 ^{+0.8} x 45.0 ^{+0.6} mm
Electrical data	Fastening	special quick plastic clamp proper to fix in wall thickness up to 50 mm
	Housing material	PC/ABS-plastic blend, colour black, UL94V-0
	Protective system	at the front IP40 connection IP00
	Weight	approx. 180 g
Mechanics	Connection	at the rear side via terminals up to 2.5 mm ²
	Lock in graduation	30° = 6 lock-in positions
Electrical data	Shaking resistance	10-2000 Hz/10 g
	Mechanical life	> 25000 switching cycles
	Operative range	voltage < 42 V current < 2 A
	Switching performance (resistive load)	1 V/1.5 A (AC/DC) 24 V/0.3 A (AC/DC) 42 V/0.2 A (AC/DC)
Ambient conditions	volume resistance	< 30 mΩ when new
	Working temperature	0 up to + 60 °C
	Storing temperature	-20 up to + 80 °C

Housing:

