


M1 – 4-digit digital panel meter in 96x24 mm (BxH) Pt1000 2-wire -200°C...850°C / -328°F...1562°F



- red display of -1999...9999 digits (optional green, orange or blue display)
- minimal installation depth: 57 mm without plug-in terminal
- adjustment via factory default or directly on the sensor signal
- min/max-value recording
- displayed in °C or °F
- display flashing at threshold exceedance / undershooting
- navigation keys for the recall of min/max-values or limit value corrections during operation
- impedance matching
- programming interlock via access code
- protection class IP65 at the front
- plug-in terminal
- accessories: pc-based configuration-kit PM-TOOL with CD & USB adapter
- on request: devices for working temperatures of -40°C...+70°C

ORDER NUMBER **EUR**
(without options)

• Pt1000 2-wire -200°C...850°C/ -328°F...1562°F



Supply 230 VAC

Supply 24 VDC

M1-3TR4B.060C.570xD **190.60**

M1-3TR4B.060C.770xD **201.20**

• Order key options

M	1-	3	T	R	4	B.	0	6	0	C.	5	7	0	x	D	EUR	
M	1-	3	T	R	4	B.	0	6	0	C.	7	7	0	x	D		
											D	Dimension/physical unit, customer-specific settings					20.00
											1	without keypad, operation via PM-TOOL					10.60
											X	Other voltage supplies on request!					
											B	Blue					35.00
											G	Green					10.10
											Y	Orange					10.10

Please state physical unit in order, e.g. °F.

• Parameterisation software


PC based configuration software PM-Tool for devices without keypad, for a simple adjustment of standard devices, incl. USB-adapter. Programming happens via an interface on the back.

PM-TOOL-MUSB4 **94.10**

• Technical data

Dimension	Housing	B96 x H24 x D57 mm (including plug-in terminal, D= 74 mm)
	Panel cut-out	92.0 ^{+0.8} x 22.2 ^{+0.3} mm
	Fixing	screw elements for insulation thickness up to 3 mm
	Housing material	PC Polycarbonate, black
	Sealing material	EPDM, 65 Shore, black
	Protection class	at the front IP65 standard, back side IP00
	Weight	approx. 50 g
	Connection	plug-in terminal; line cross-section up to 2.5 mm ²
Display	Display	4-digit
	Digit height	14 mm
	Segment colour	red (standard), optional available in green, blue and orange
	Display range	-1999 to 9999
	Setpoints	optical display flashing
	Overflow	horizontal bars at the top
	Underflow	horizontal bars at the bottom
	Display time/ Measuring time	0.1 to 10.0 seconds
Measuring input	Span	-200°C...850°C / -328°F...1562°F
	Measuring fault	0.2% of measuring range, ± 1 digit
	Temperature drift	100 ppm/K
	Measuring principle	U/F-conversion
	Resolution	approx. 0.1°C or 0.1°F
Power pack	Supply	230 VAC ±10 % (max. 3 VA) 24 VDC ±10 %, galvanic isolated (max. 1 VA)
	EEPROM	Data life ≥ 100 years at 25°C
Ambient conditions	Working temperature	0 to +60°C
	Storing temperature	-20 to +80°C
	Climatic density	relative humidity 0-85% on years average without dew
CE-sign	Conformity to directive 2014/30/EU	
EMV	EN 61326, EN 55011	
Safety standard	According to low voltage directive 2014/35/EU, EN 61010; EN 60664-1	

Housing:

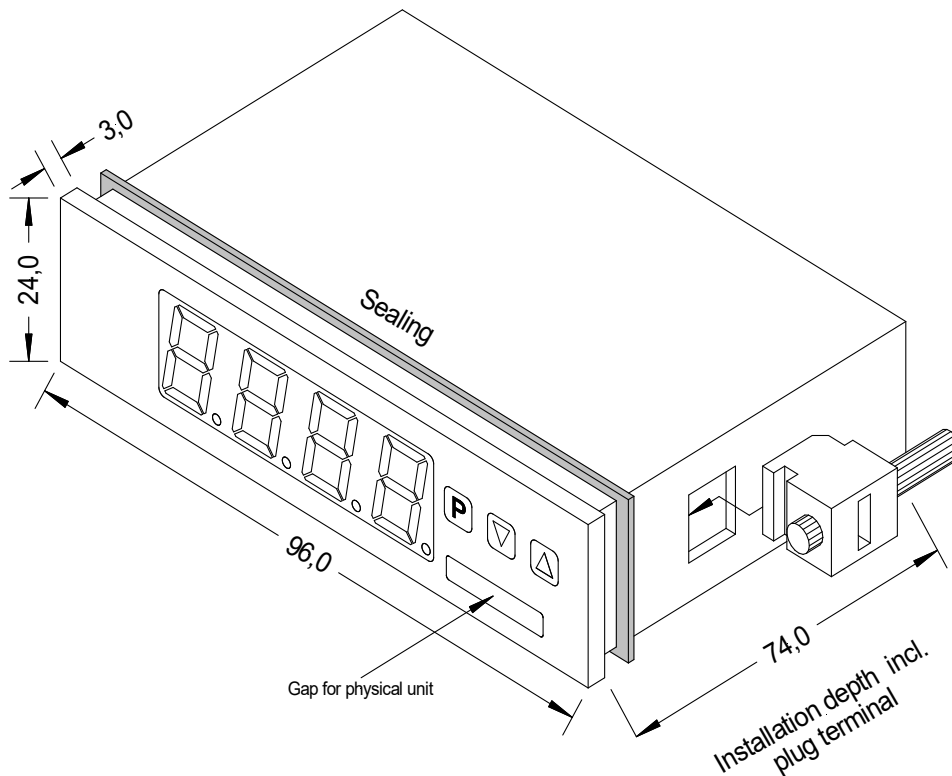

• Ordering code M1

	M	1	-	3	T	R	4	B.	0	6	0	C.	7	7	0	x	D		
Basic type M-Line																			Dimension
																			<input type="checkbox"/> D physical unit
Installation depth																			Version
74 mm incl. plug-in terminal																			<input type="checkbox"/> x internal version
Housing size																			Switching points
96 x 24 x 57 mm																			<input type="checkbox"/> 0 no switching points
Display type																			Protection class
Temperature																			<input type="checkbox"/> 1 without keypad, operation via PM-TOOL
Display colours																			<input type="checkbox"/> 7 IP65 / plug-in terminal
Blue																			Supply voltage
Green																			<input type="checkbox"/> 5 230 VAC
Red																			<input type="checkbox"/> 7 24 VDC galv. isolated
Orange																			Measuring input
Number of digits																			<input type="checkbox"/> C Pt1000
4-digit																			Analog output
Digit height																			<input type="checkbox"/> 0 without
14 mm																			Pt1000 type
Interface																			<input type="checkbox"/> 6 2-wire
without																			