



## **M3 – 5-digit digital panel meter in 96x24 mm (BxH) Potentiometer >1 kΩ ... <1000 kΩ**

- red display from -19999...99999 digits (optional green, orange, blue or tricolour display)
- installation depth: 120 mm without plug-in screw terminal
- multi voltage power supply unit 100-240 VAC, alternatively 10-40 VDC galvanic isolated
- adjustment via factory setting or directly on the sensor signal
- min/max-memory with adjustable permanent display
- 30 additional adjustable support points
- display flashing at threshold value exceedance / undercut
- navigation keys for the triggering of Hold, Tara, display change, setpoint setting, alarm actuation
- flexible alarm system with adjustable delay times
- volume measurement (Totaliser)
- mathematical functions like reciprocal value, square root, square and rounding
- constant setting / setpoint setting
- sliding averaging
- brightness control via parameter or front keys
- programming interlock via access code
- protection class IP65 at the front
- plug-in screw terminal
- optional: 1 or 2 relay outputs
- optional: 1 independently scalable analog output
- optional: interface RS232 or RS485
- accessories: pc-based configuration-kit PM-TOOL with CD & USB adapter
- on request: devices for working temperatures of -20°C...60°C or -40°C...70°C


• **Potentiometer 0-100 % (>1 kΩ ... <1000 kΩ)**

Supply 100-240 VAC, DC ± 10%


**M3-3VR5B.0005.S70xD** 248,00

Supply 10-40 VDC, 18-30 VAC


**M3-3VR5B.0005.W70xD** 248,00

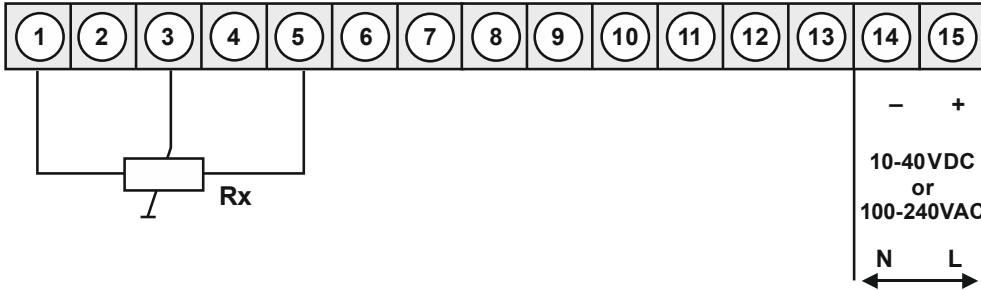

**Options:**

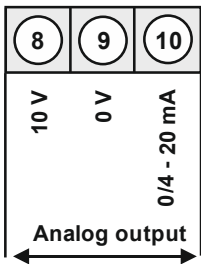


or




**Interface RS232**  
(Modbus protocol)

or



**Interface RS485**  
(Modbus protocol)

or

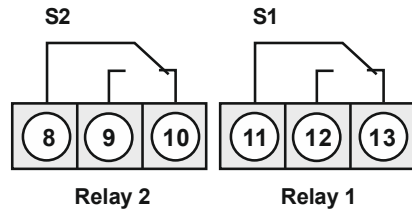

**Alternatively to analog output**

• **Product key options**

M	3-	3	V	R	5	B.	0	0	0	5.	S	7	0	x	D
M	3-	3	V	R	5	B.	0	0	0	5.	W	7	0	x	D

**EUR**

1	1 relay output (with option analog output only 1 switching output is possible)	20,00
2	2 relay outputs	30,00
1	without keypad, operation via PC software PM-TOOL	10,00
X	Analog output 0/4-20 mA, 0-10 VDC	90,00
3	Interface RS232 galv. isolated	65,00
4	Interface RS485 galv. isolated	65,00
B	Blue	44,00
G	Green	10,00
Y	Orange	4,00
T	Tricolour (Red-Green-Orange)	30,00

On demand state dimension unit on order, e.g. %.

• **Parameterisation software**

PC based configuration software PM-Tool for devices without keypad, for a simple adjustment of standard devices, incl. CD & USB-adapter. Programming happens via an interface on the back.


**PM-TOOL-MUSB4**

**89,00**

• **Technical data**

<b>Dimensions</b>	Housing	B96 x H24 x D120 mm, (incl. plug-in terminal D= 145 mm cable outlet at the back)
	Panel cut-out	92.0 <sup>+0.8</sup> x 22.2 <sup>+0.3</sup> mm
	Fixing	screw elements for a wall thickness up to 10 mm
	Housing material	PC Polycarbonate, black
	Sealing material	EPDM, 65 Shore, black
	Protection class	at the front IP65 standard, at the back IP00
	Weight	approx. 250 g
	Connection	plug-in terminal; wire cross section up to 2.5 mm <sup>2</sup>
<b>Display</b>	Display	5-digit
	Digit height	14 mm
	Segment colour	red (Standard), optional in green, orange, blue or tricolour (red/green/orange)
	Range of display	-19999 to 99999
	Threshold value	optical display flashing
	Overflow	horizontal bars at the top
	Underflow	horizontal bars at the bottom
	Display time	0.1 to 10.0 seconds
<b>Measuring input</b>	Span	>1 kΩ ... <1000 kΩ
	Measuring range	0-100 %
	Measuring fault	0.5% of measuring range, ± 1 digit
	Temperature drift	100 ppm/K
	Measuring time	0.1 ... 10.0 seconds
	Measuring principle	U/F-conversion
	Resolution	approx. 18 bit at 1 sec measuring time
<b>Output</b>	Relay	with change-over contact 250 V / 2 AAC, 30 V / 2 ADC
	Switching cycle	30 * 10 <sup>3</sup> at 2 AAC, 2 ADC ohm resistive burden, 10 * 10 <sup>6</sup> mechanically
	Separation	according to DIN EN50178 / Specific values according to DIN EN 60255
	Analog output	0-10 VDC / burden ≥ 10 kΩ, 0/4-20 mA / burden ≤ 500 Ω, 16 bit
<b>Interface</b>	Protocol	Modbus with ASCII or RTU-protocol
	RS232	9.600 Baud, no parity, 8 DataBit, 1 StopBit, pipeline length max. 3 m
	RS485	9.600 Baud, no parity, 8 DataBit, 1 StopBit, pipeline length max. 1000 m
<b>Power pack</b>	Supply	100-240 VAC 50/60 Hz, DC ±10 % (max. 10 VA) 10-40 VDC galv. isolated, 18-30 VAC 50/60 Hz (max. 10 VA)
<b>Memory</b>	EEPROM	Data preservation ≥ 100 years at 25°C
<b>Ambient condition</b>	Working temperature	0 to +50°C
	Storing temperature	-20 to +80°C
	Climatic density	relative humidity 0-85% on years average without dew
<b>CE-sign</b>	Conformity to directive 2014/30/EU	
<b>EMV</b>	EN 61326, EN 55011	
<b>Safety standard</b>	According to low voltage directive 2014/35/EU, EN 61010; EN 60664-1	

**Housing:**

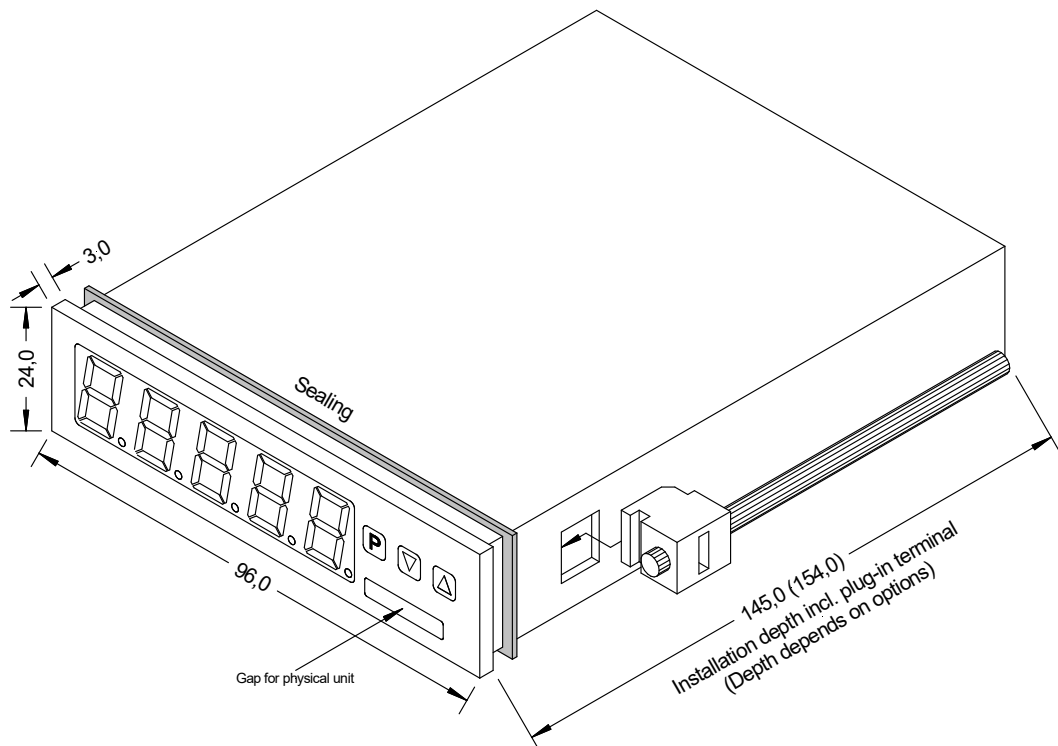

• Order key

	M	3-	3	V	R	5	B.	0	0	0	5.	W	7	0	x	D	
<b>Standard type M-Line</b>																	<b>Dimension</b>
																	<input type="checkbox"/> D physical unit (free selectable)
<b>Installation depth</b> 145 mm incl. plug-in terminal (154 mm)																	<b>Version</b>
																	<input type="checkbox"/> x internal version
<b>Housing size</b> 96x24x120 mm (BxHxT)																	<b>Switching points</b>
																	<input type="checkbox"/> 0 without
																	<input type="checkbox"/> 1 1 relay output
																	<input type="checkbox"/> 2 2 relay outputs
<b>Display type</b> Potentiometer																	<b>Protection class</b>
																	<input type="checkbox"/> 1 without keypad, operation via PM-TOOL
																	<input type="checkbox"/> 7 IP65 / plug-in terminal
<b>Display colours</b> Blue Green Red Red/Green/Orange Orange																	<b>Supply voltage</b>
																	<input type="checkbox"/> S 100-240 VAC
																	<input type="checkbox"/> W 10-40 VDC
<b>Number of digits</b> 5-digits																	<b>Measuring input</b>
																	<input type="checkbox"/> 5 >1 kΩ ... <1000 kΩ
<b>Digit height</b> 14 mm																	<b>Analog output</b>
																	<input type="checkbox"/> 0 without
																	<input type="checkbox"/> X 1x 0-10 VDC, 0/4-20 mA
<b>Digital input</b> without Interface RS232 Interface RS485																	<b>Sensor supply</b>
																	<input type="checkbox"/> 0 without